

Tow-Trust Towbars

Important: Please read General Notes overleaf before fitting

lssue 14


TVW 623VK Volkswagen Golf 5 Hatch 2004> Golf 6 Hatch 2009> Volkswagen Golf Plus 2005> Golf 7 Hatch 2012> Audi A3 2012> Golf SV 2014> Seat Leon 2013>

Item	Qty	Description	Item	Qty	Description
А	1	Crossmember	D	2	M12 x 25 Bolts & S/P Washers
В	2	Side Arms	Е	6	M12 x 50 Bolts & S/P Washers
С	1	ACS Detachable Neck 6212	F	3	M12 x 22 Bolts & S/P Washers
			G	10	12 x 25 Flat Washers
			н	1	Socket Plate 1
			К	4	Handed 2mm End Plate Lasers
			L	1	Flip Up Socket Plate (Part No. TTFP/RH)

- 1. Remove the rear light clusters.
- 2. Remove rear bumper. Fixings along the lower edge, under each light cluster and around each wheel arch.
- 3. Remove the bumper crossbeam (this is not refitted). Replace existing bolts.
- 4. Locate Item **B** inside each chassis and using Item **E** with Item **G** loosely bolt to forward existing holes (these are covered with tape).
- 5. Using Item E with Item G loosely bolt Item A to Item B and through existing rearmost holes. Fully tighten all bolts.
- 6. Using Item F with Item G and Item D with Item G bolt Item C and Item H to Item A and fully tighten.
- 7. GOLF 5/6/7: Remove the lower BLACK diffuser from rear bumper and replace with new original equipment Diffuser and Tow-Flap (ordered separately from VAG GROUP Dealer).
- 8. GOLF 7.5: No lower diffuser is required, Std. bumper with Flat edge and has an original cut.
- 9. AUDI / SEAT: Cut rear bumper as shown.
- 10. Refit bumper and light clusters.

Important Information: This Towbar is for use with VAG GROUP OEM bumper diffuser with cut out and tow-flap panel.

Please contact Volkswagen dealer with vehicle description and vehicle identification number (VIN) to source the correct parts

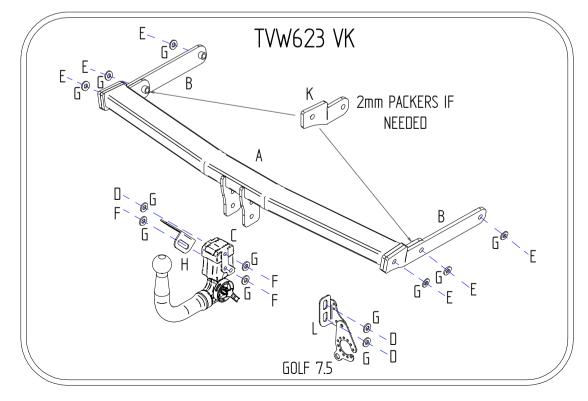

Notes:

- 1. Recommended Torque Setting for M12 Grade 10.9 -130 Nm. (For other Torque Settings see notes overleaf.)
- 2. Nose load limits and vehicle manufacturer's trailer / caravan weight limits must be observed.

